


POWERED UNL-1063

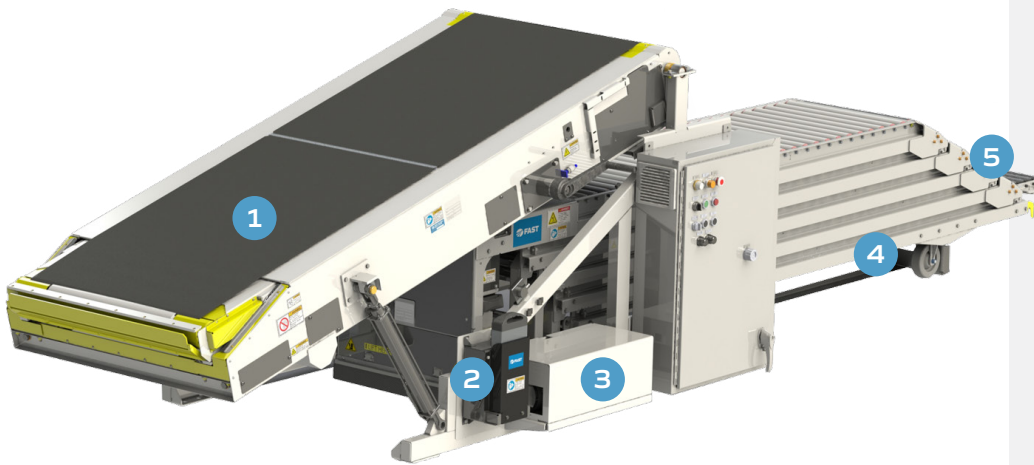

The 42W single stage extendo and gravity unloader combo.

Incorporating a FAST powered unit into this gravity unloader maintains commonality across the loading and unloading docks. With the aid to the extension/retraction of the gravity unloader, operators can more easily position the unit's pull-out extensions at variable lengths to align with package wall depth changes. The integrated power take-off on the gravity unloader helps facilitate transition of product to the single stage keeping product moving with ease.

The Powered UNL-1063 has a footprint and reach comparable to a multi-stage. The hand crank in/out of the boom keeps costs down. The integration of the hydraulic raise/lower and electrical panel reduces the upfit costs of the unit during installation.

KEY FEATURES

1. 42W single stage extendo and powered gravity unloader with hand crank in/out functionality
2. Spare battery with charging station integrated into the electrical cabinet
3. Hydraulic power unit to raise and lower the single stage
4. Steel Gravity Unloader with powered unit
5. Integrated power take-off to facilitate transition of product to the single stage

OPTIONS


- Range of power requirements for the overall unit
- Belt speed options up to 70 fpm for the single stage
- Oversized package guarding for the single stage
- Side pan for the single stage



**GET FULL
PRODUCT
INFO**

SPECIFICATIONS

Battery	48 V; operational charge lasts ≈15-25 trailers	Travel Speed	≈3/4 mph in both directions
Power Requirements	480 V 3-Phase; Other options available upon request	Powered Force	<20 lbs. assisted push/pull force under normal conditions
Belt Speed	Up to 70 fpm	Machine Base Width	4 ft. 2 1/2 in. (50 1/2 in.)
Roller Size	24 in. high impact PVS gravity rollers	Retracted Length	18 ft. 9 3/8 in. (225 3/8 in.)
Load Capacity	50 lbs./ft.	Extendable Length	54 ft. 1 7/8 in. (649 7/8 in.)
Operation	Hand crank boom extension; hydraulic raise & lower push buttons; belt on/off switch; assisted extension/retraction of the gravity unloader	Overall Length	70 ft. 7 7/8 in. (847 7/8 in.)

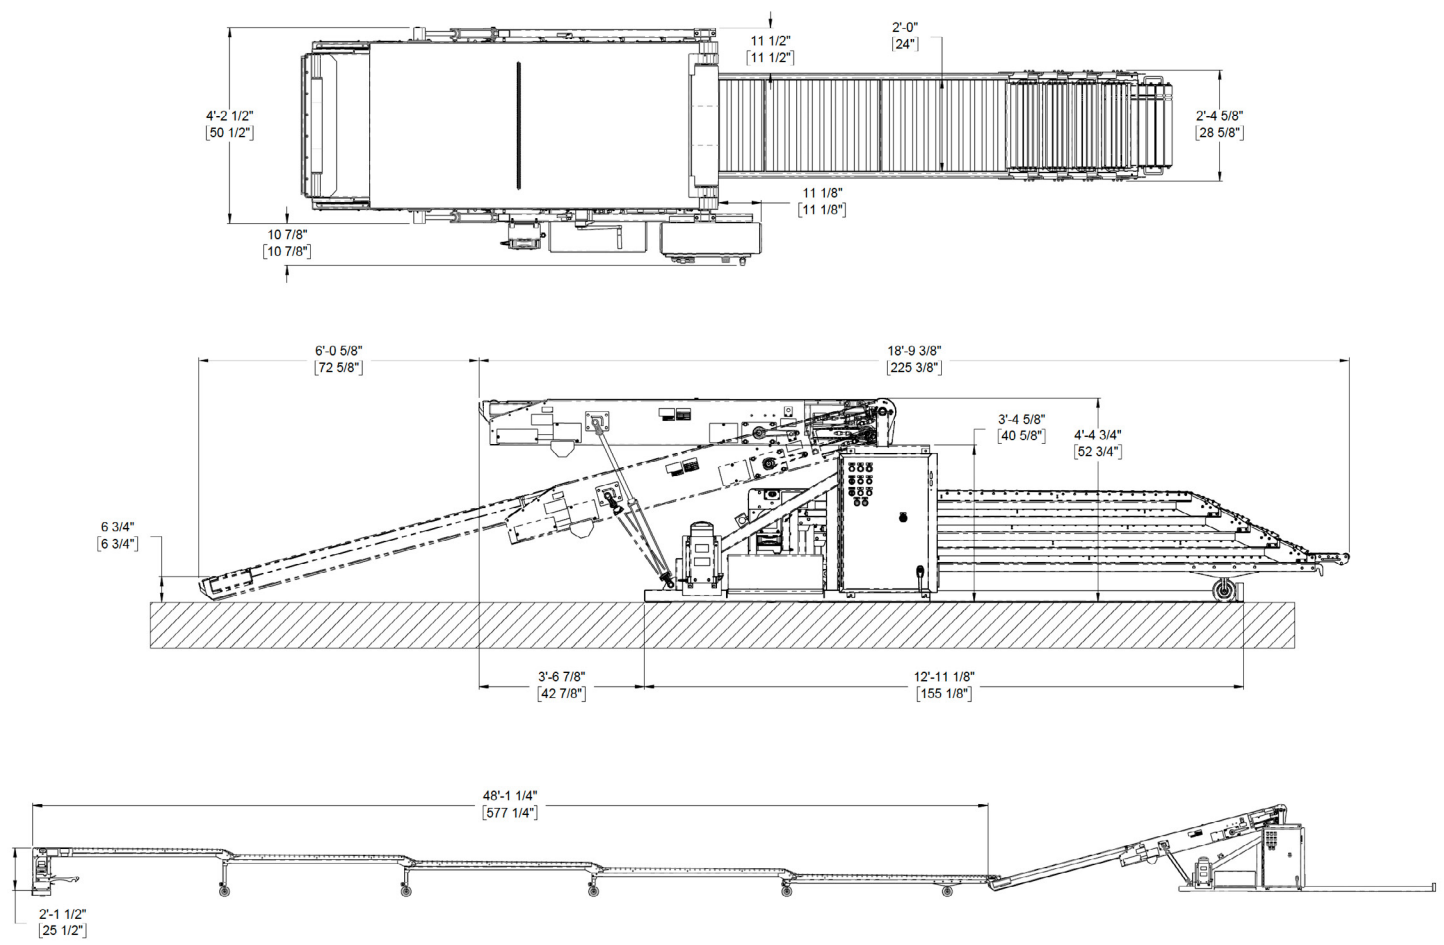

A world leader in airline, air cargo and material handling equipment for over 45 years.

FAST Global Solutions designs, builds, installs and services an expansive portfolio of robust, ruggedly-built, dependable equipment for today's global commerce operations. To learn more, contact the knowledgeable and experienced FAST Team.

conveyorsales@fastsolutions.com +1 (320) 634-5126 fastsolutions.com